



Scan QR for E-Catalog



super_hylam_laminates

Super Hylam[®]
Driven by Quality



SUPER HYLAM PVT. LTD.
Narela Road, Kundli - 131028, Sonipat, Haryana. | 0130-221956,57,58
www.superhylam.com | support@superhylam.com

ACRYLIC
SYMPHONY
WHERE COLORS COLLIDE



ACRYLIC
SYMPHONY
WHERE COLORS COLLIDE

Super Hylam[®]
Driven by Quality

Beyond Canvas



The intricate details and refined finishes add a touch of luxury, while the versatile color palettes and patterns cater to diverse design preferences.

THE KIYA LAM SAGA

6H ANTI
SCRATCH
ACRYLIC



Kiyalam 6H anti-scratch acrylic laminates are engineered to provide exceptional durability and resistance to daily wear and tear, with a robust 6H hardness rating, these laminates offer superior protection against scratches, ensuring long-lasting beauty and functioning for a wide range of applications. The advanced acrylic surface not only enhances the aesthetic appeal of the laminates but also ensures that they maintain their pristine appearance even after prolonged use. These laminates are ideal for high-traffic areas and environments where resilience and longevity are paramount. Whether used in residential or commercial settings, the 6H anti-scratch acrylic laminates offer peace of mind by preserving the integrity of the surface and minimizing the visibility of scratches, maintaining their original luster and finish. Additionally, the easy maintenance and cleaning of these laminates make them a practical choice for various interior design projects, providing both aesthetic value and practicality.



1.5MM
THICKNESS


6H ANTI
SCRATCH
ACRYLIC



ANTI SCRATCH



ANTI FINGER PRINT



ANTI YELLOW



UV PROTECTED



PURE ACRYLIC



TERMITE FREE



WATER
RESISTANT

F E A T U R E S

Our laminates offer more than just surface protection; they embody durability with a touch of elegance, making them the perfect choice for elevating interior spaces.



FLUTE

page. 8-13




MARBLE

page. 14-19



MIRROR

page. 20-21

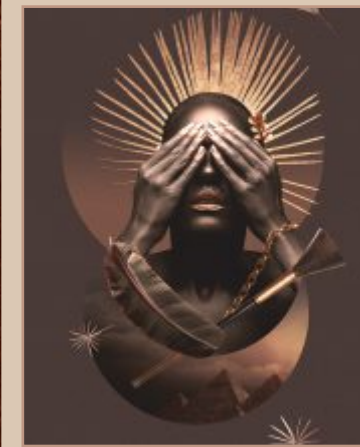

SHIMMER

page. 22-23



METALLIC

page. 24-27




UNI COLOR

page. 28-39

Their versatility and adaptability allow for endless creative possibilities, ensuring that each space exudes a unique and personalized charm.



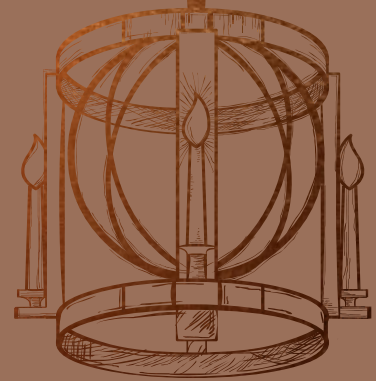

OUR VALUES

Commitment to quality, innovation, and customer satisfaction.



OUR VISION

Empowering spaces with innovative design and functionality, our vision is to redefine interior experiences and inspire creativity in every environment we touch.



OUR MISSION

We are committed to delivering exceptional quality and unmatched customer satisfaction, striving to transform interiors with our cutting-edge solutions and timeless elegance.



FLUTE



Sophisticated Allure, Practical Functionality

Embrace modern
verve with an innovative
collection.

FLUTE



FT 01


There can be colour variation in material from different batches, it is advised to use same batch material colour variation.
Actual colour of the laminate sheet may slightly vary from the sample in this catalogue.

FLUTE


Used
Acrylic FT 08

Innovative Design, Superior Performance

Where functionality
meets stunning appeal,
it's exceptional.

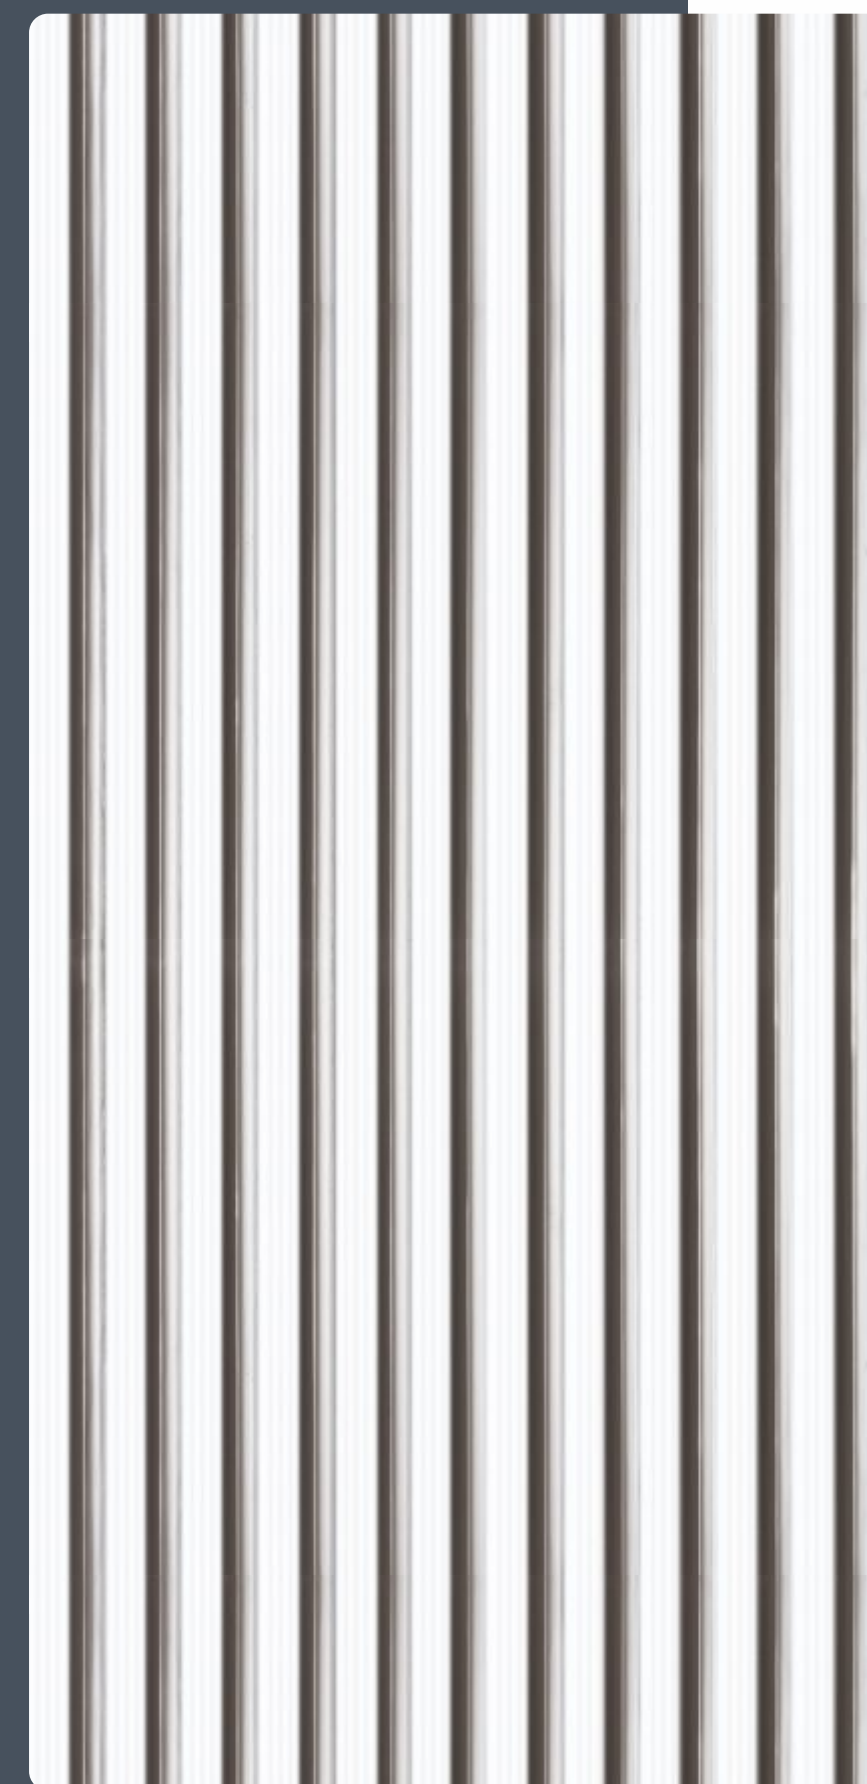

FT 15

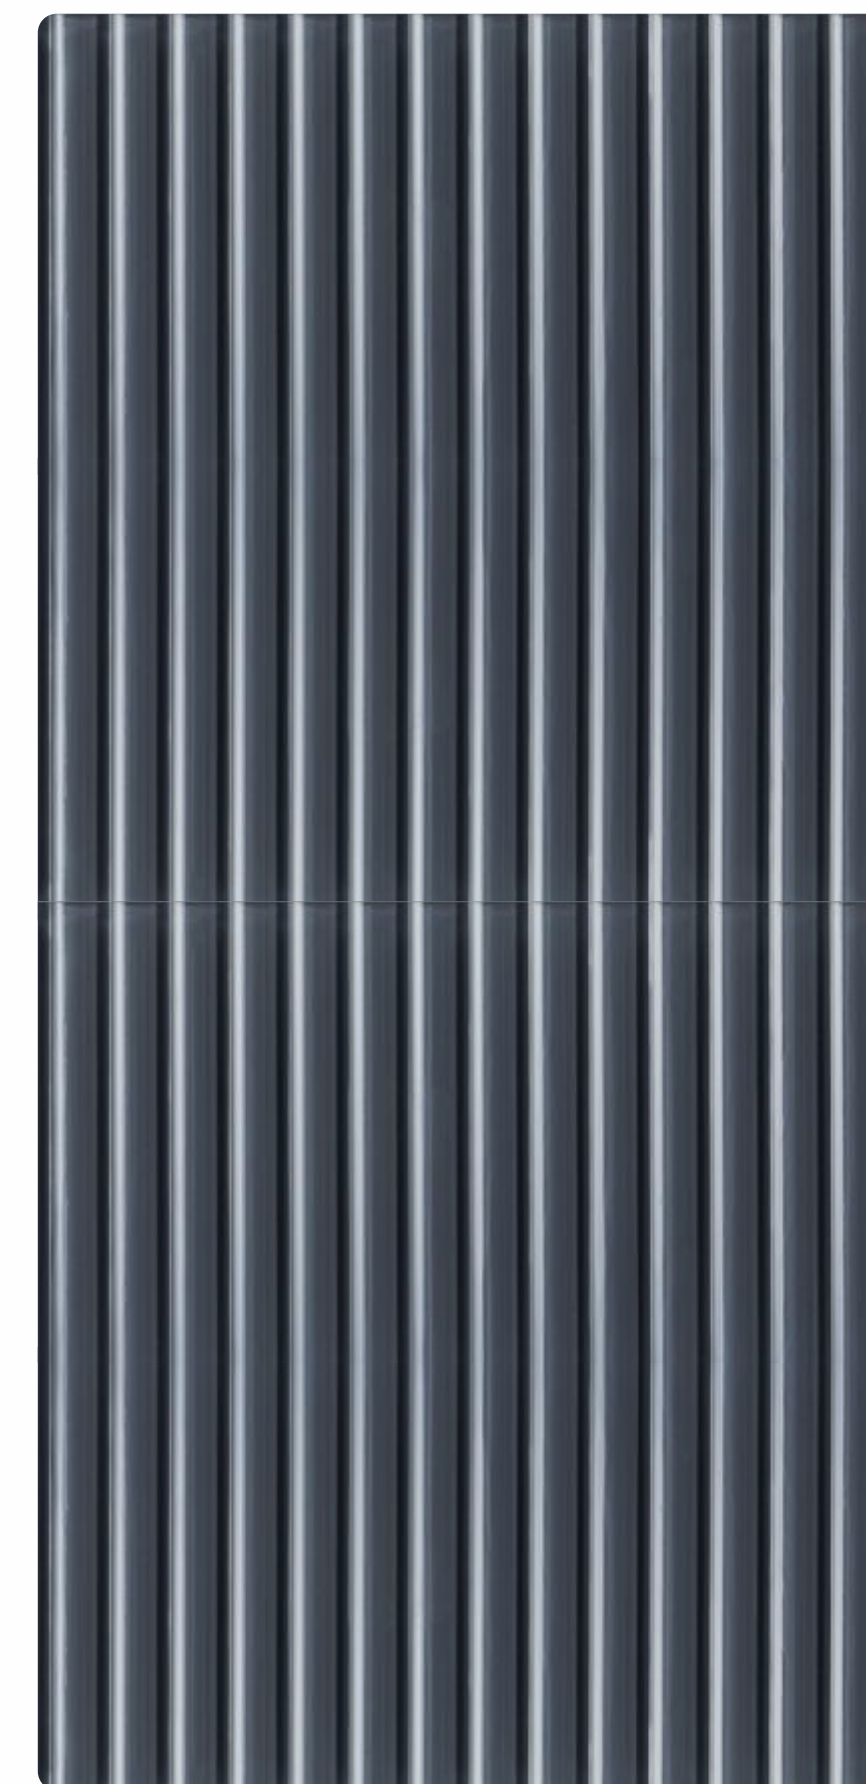

FT 08




ANTI
SCRATCH



ANTI FINGER
PRINT

There can be colour variation in material from different batches, it is advised to use same batch material colour variation.
Actual colour of the laminate sheet may slightly vary from the sample in this catalogue.

FLUTE

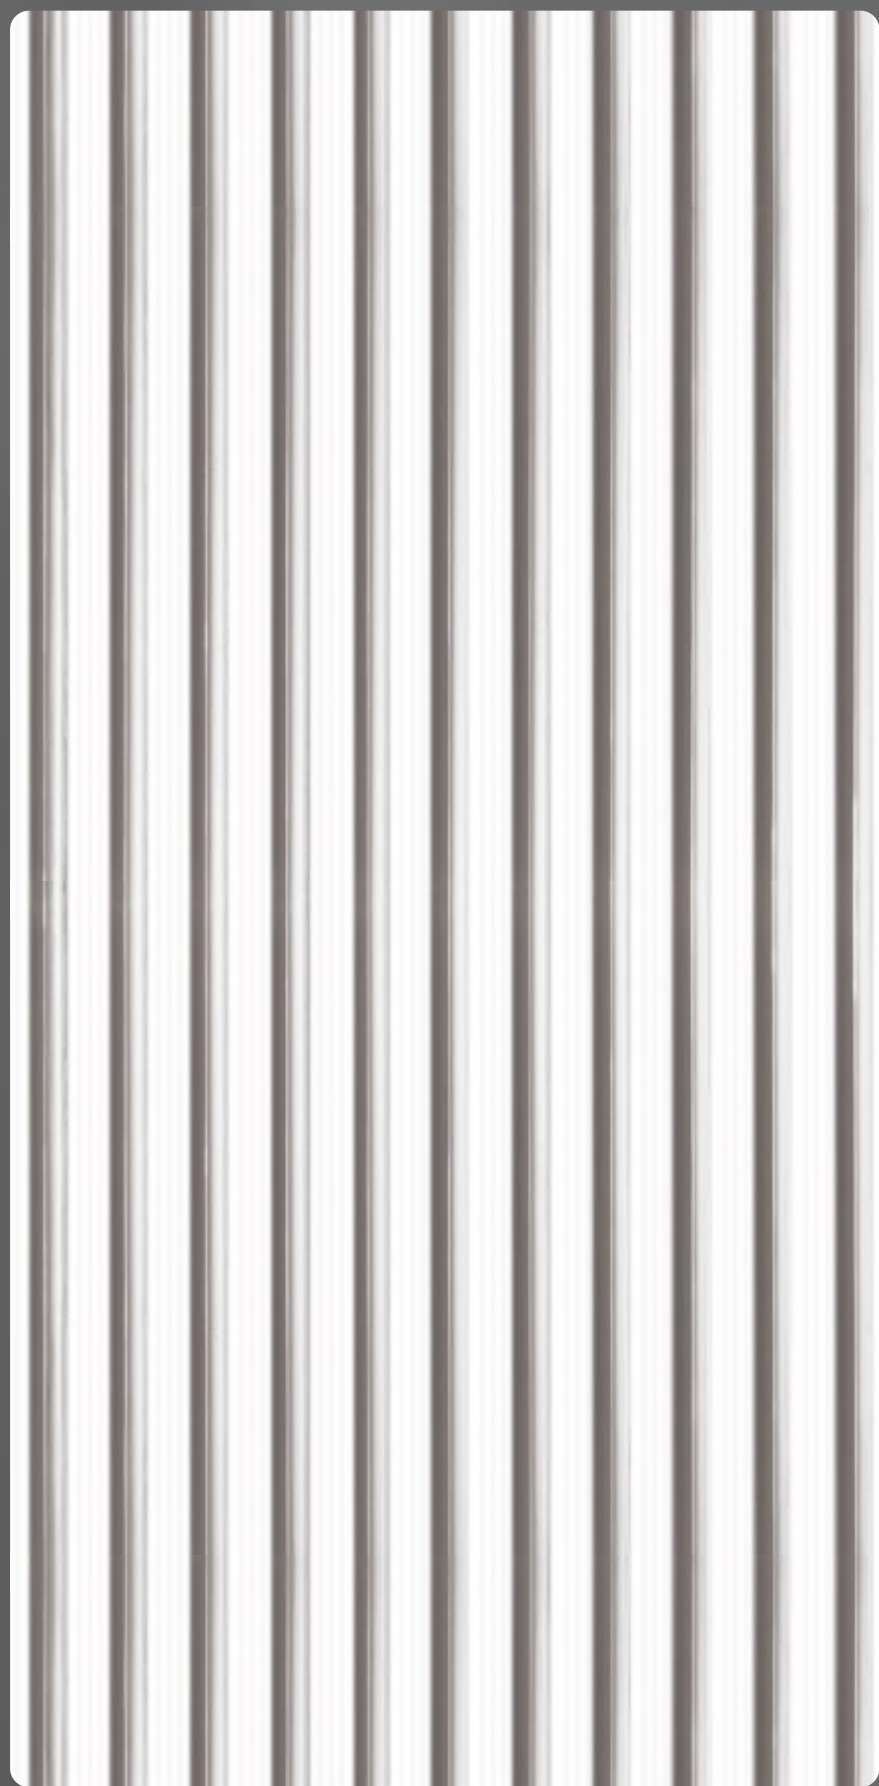

FT 16



FT 02



ANTI
SCRATCH



ANTI FINGER
PRINT

Contemporary Charm,
Enduring Strength

Discover the
allure for your interior
transformations.



Used
Acrylic ML 01

MARBLE

MARBLE



ML 01

There can be colour variation in material from different batches, it is advised to use same batch material colour variation.
Actual colour of the laminate sheet may slightly vary from the sample in this catalogue.

01



Used
● Acrylic ML 02

Chic, Practical, Striking Aesthetics

Create spaces that
inspire with a captivating
range.

MARBLE



ML 02

There can be colour variation in material from different batches, it is advised to use same batch material colour variation.
Actual colour of the laminate sheet may slightly vary from the sample in this catalogue.

02

MARBLE



ML 03

03

Dynamic, Versatile,
Enduring Beauty

Unleash the potential of
your interiors with dynamic
designs.



Used
● Acrylic MR 02

MR 02




MIRROR

MR 01



MR 03

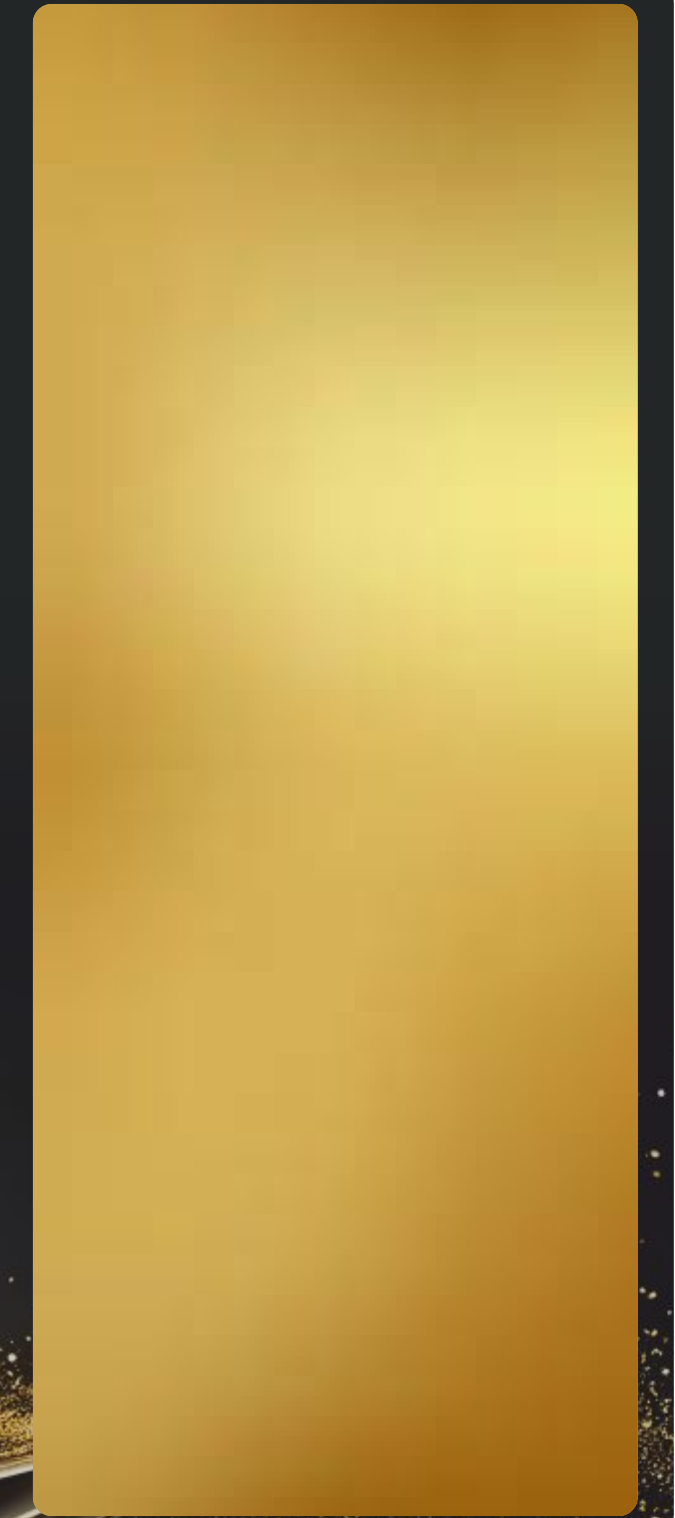


There can be colour variation in material from different batches, it is advised to use same batch material colour variation.
Actual colour of the laminate sheet may slightly vary from the sample in this catalogue.


SHIMMER




SHIMMER

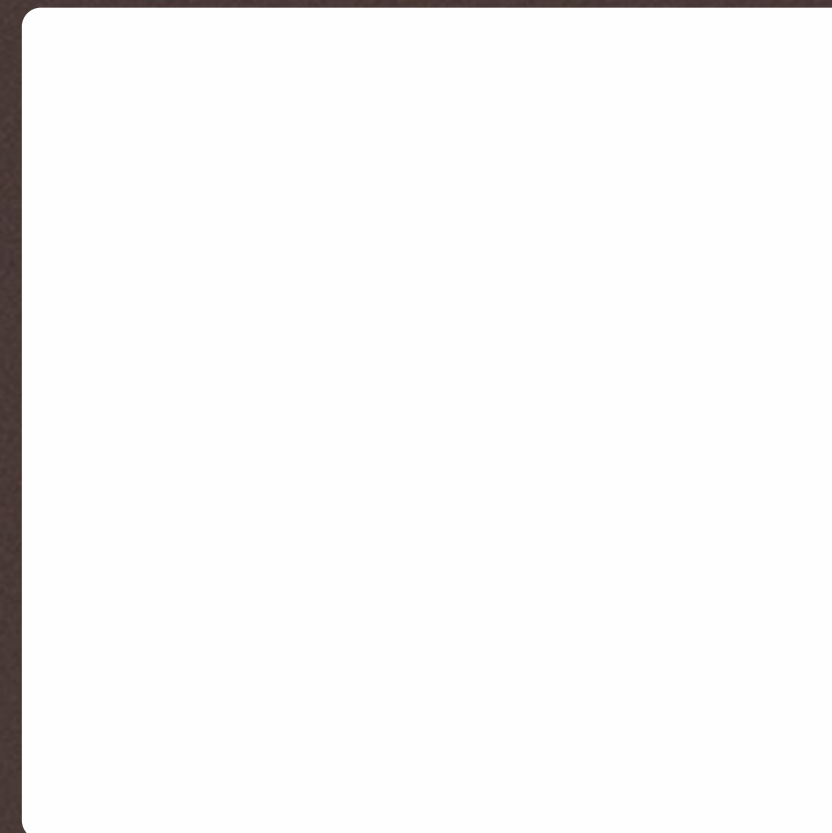

SM 01

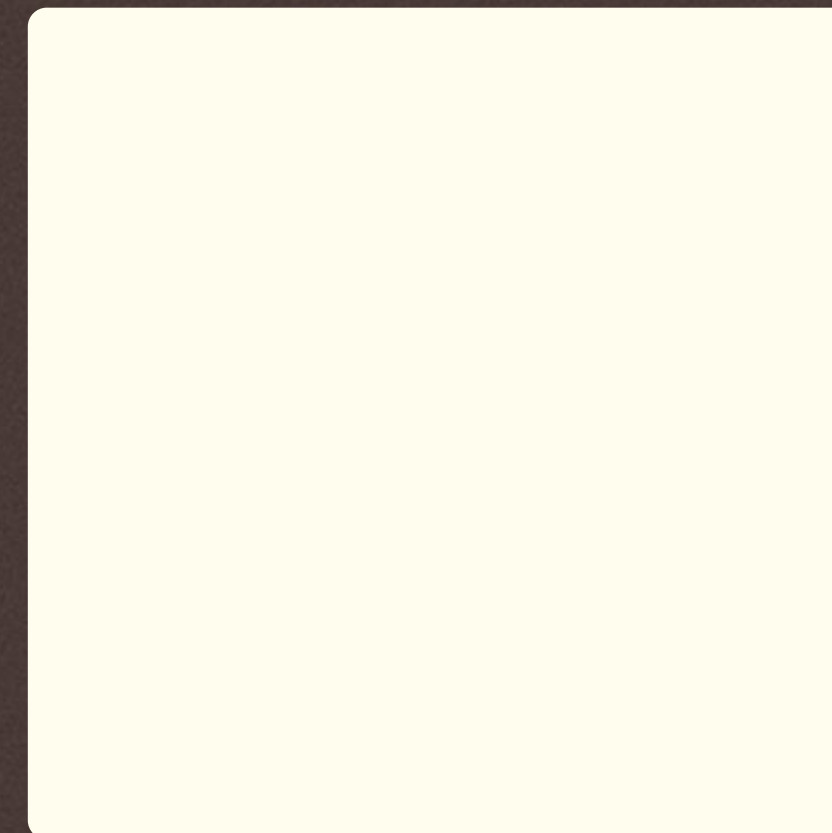

SM 03

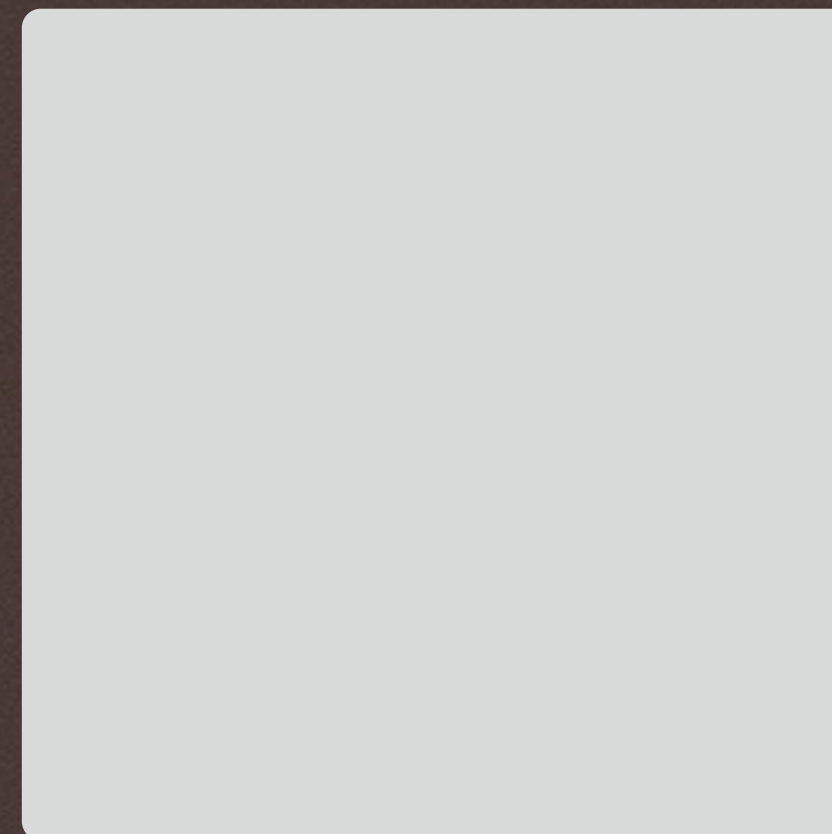

SM 02



SM 04

There can be colour variation in material from different batches, it is advised to use same batch material colour variation.
Actual colour of the laminate sheet may slightly vary from the sample in this catalogue.

METALLIC

METALLIC



MT 03




MT 05




Modern Verve,
Timeless Elegance

Explore the
epitome of style and
sophistication.

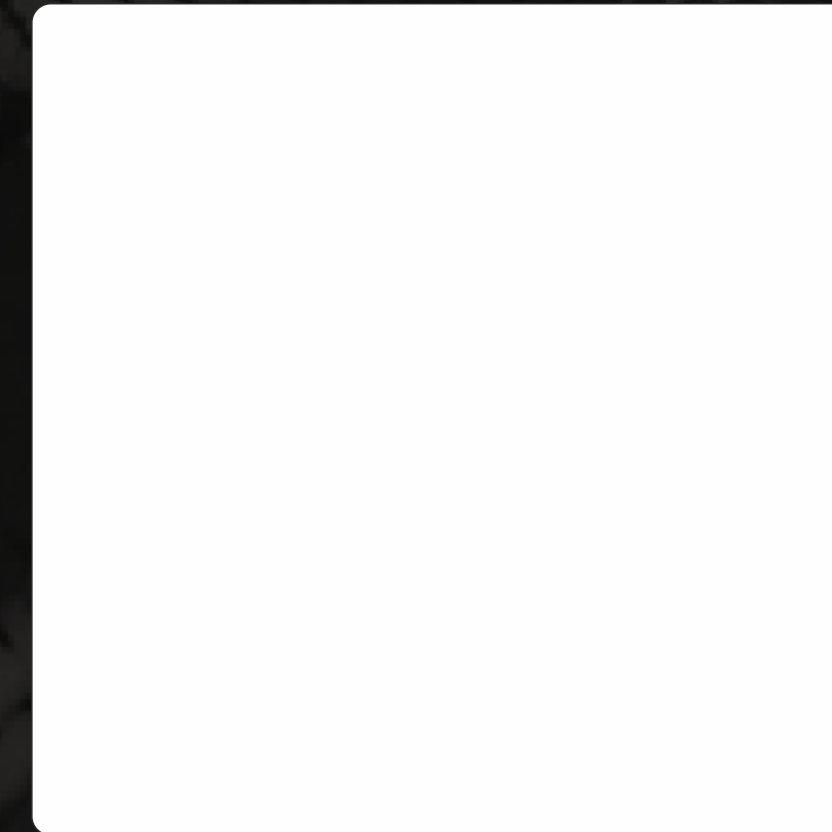


MT 04

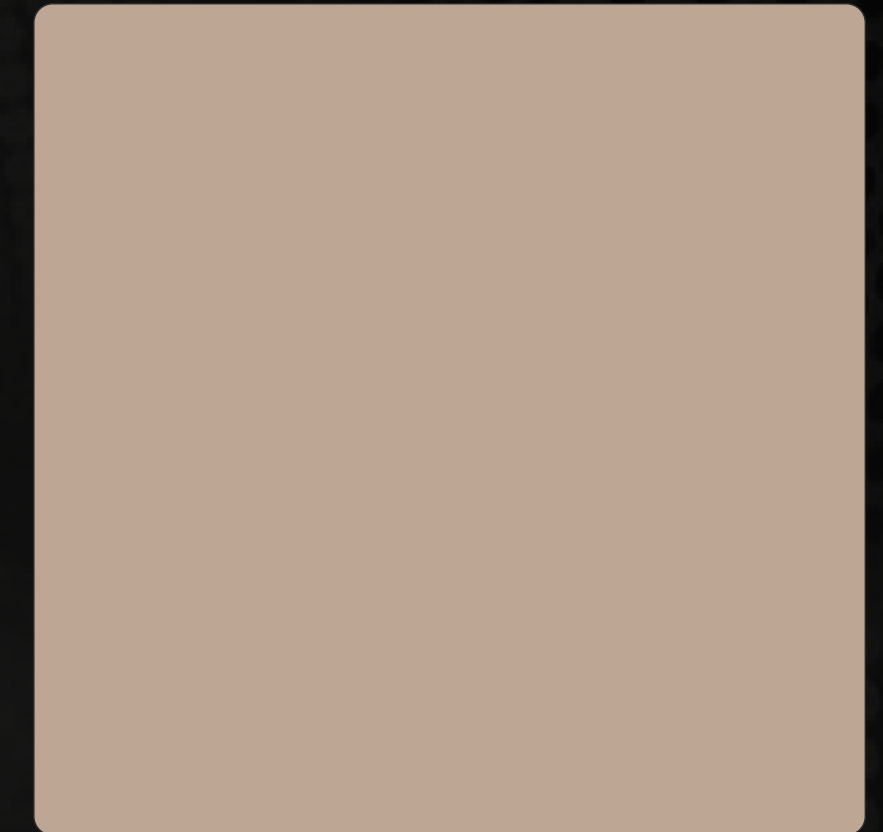


MT 09



METALLIC




MT 01




MT 06



Used
Acrylic MT 01



MT 02




MT 07



Captivating Style,
Functional Innovation

Elevate your spaces
with chic and contemporary
options.



MT 08

There can be colour variation in material from different batches, it is advised to use same batch material colour variation.
Actual colour of the laminate sheet may slightly vary from the sample in this catalogue.

UNI COLOR



Used
● Acrylic S 07


UNI COLOR

S 01



A Spectrum
of Possibilities
in Solid Color Laminates


UNI COLOR



S 06



S 08



S 09

UNI COLOR




S 04

Stunning Appeal, Lasting Durability


Embrace elegance and
style with captivating
options.

Used
● Acrylic S 04

UNI COLOR



S 03



S 05




S 07

UNI COLOR


Solidify Style



S 18

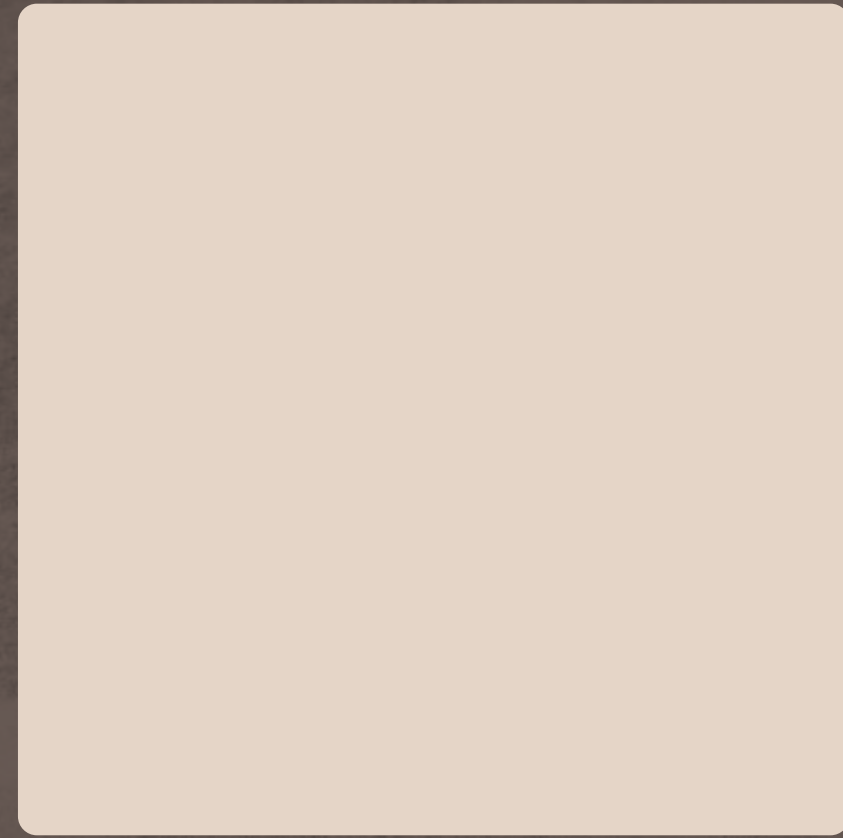

S 20

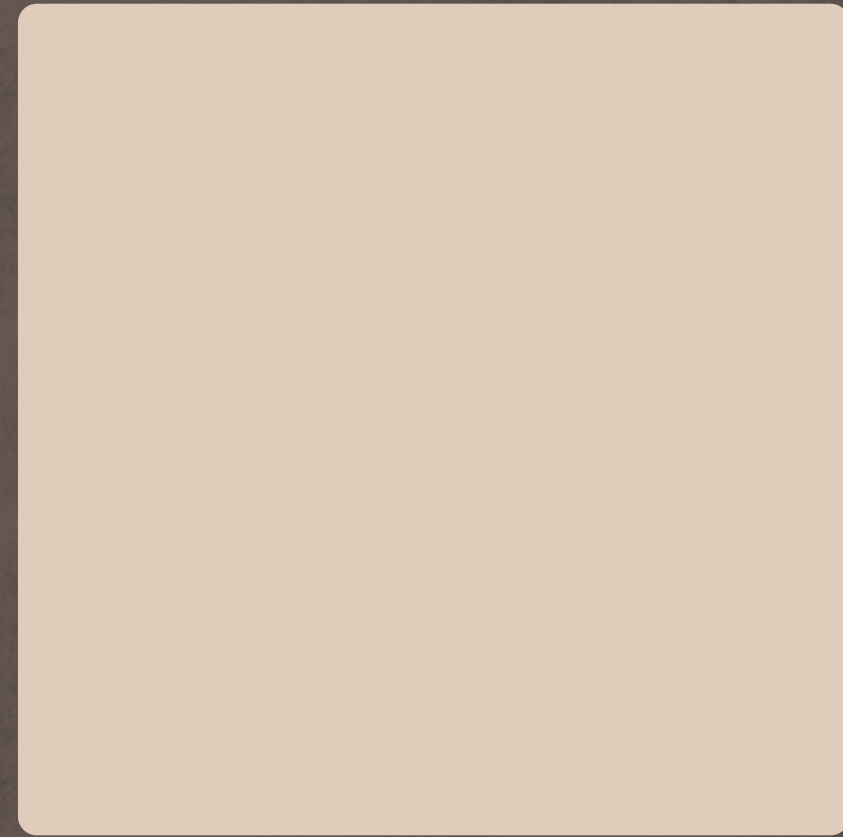


S 02




S 16




S 14



S 12



S 10



S 11

UNI COLOR

Shades of Brilliance

Smart Surfaces,
Elegant Designs

UNI COLOR




S 13




S 17



Make the smart choice
for enhancing your interior
aesthetics.



S 15



S 19

EDGE BANDING

The Finesse of edge banding makes the edge foolproof, giving it a seamless finish. Used for plywood, particle boards, or MDF, it increases the material's durability, giving an appearance of solid and more valuable material.



Matching Edgeband 965

S 15



Matching Edgeband 92

S 06



Matching Edgeband 963

S 08



Matching Edgeband 911

S 09



Matching Edgeband 954

S 20



Matching Edgeband 955

S 02



Matching Edgeband 953

S 03



Matching Edgeband 952

S 04



Matching Edgeband 914

S 18



Matching Edgeband 909

S 05



Matching Edgeband 95

S 07



Matching Edgeband 936

S 10



Matching Edgeband 957

S 12



Matching Edgeband 958

S 11



Matching Edgeband 961

S 19



Matching Edgeband 960

S 17



Matching Edgeband 959

S 13



Matching Edgeband 966

S 14


EDGE BANDING

Where Minimalism Meets Magnificence,
Elevating Spaces with Effortless Sophistication.



Matching Edgeband 966

S 01



Matching Edgeband 964

S 16



WAYS TO KEEP KIYALAM ACRYLIC LAMINATE NEW FOREVER ?

Follow some steps mentioned as below to maintain Kiyalam Acrylic Laminates.

To clean the surface of Acrylic Laminates do not use thinner.

Wipe the surface gently with a non- abrasive cloth.

Avoid the use of abrasive liquid cleaners, bleaching compounds or solution as these may damage the surface of the laminates.

Use mild house hold glass cleaner like COLIN to remove more stubborn stains.

You can use normal water also for cleaning.

Do not place hot cookware directly on the Acrylic Laminate.

Always store Acrylic laminates temperature below 300 Celsius.

HOW TO APPLY KIYALAM ACRYLIC LAMINATES ON INTERIORS & FURNITURES

Use balancing sheet on backside.

Always clean the dust particles properly from the substrate (plywood MDF, Particle Board) surface by cloth or soft brush.

Always use good quality branded adhesive to stick Acrylic Laminates on substrate.

Please don't add water in adhesive before using it.

Spread the adhesive uniformly by brush, roller or adhesive spreader on Acrylic Laminate and base substrate (Plywood, MDF, Particle Board).

It is necessary to remove the air between Acrylic Laminates and substrate. Please leave minimum 2mm of groove between two pieces of Acrylic Laminate.

At the end of pressing Acrylic Laminate on base substrate (Plywood, MDF, Particle Board) always use soft pinch roller or normal pressing technique to protect to protect surface from any damage.

The pressing should be done from the middle of the panel and move towards to the sideline and corners of the panel.

For better bonding of Acrylic Laminate on substrate, press it for minimum 12 to 15 hours.

Peel off the protective film within 15 days of installation.



WAYS TO PREVENT KIYALAM ACRYLIC LAMINATES FROM COLOR FADE OR YELLOWING

Do not expose your Acrylic Laminates furniture to direct sunlight, it may cause discolouring, fading and yellowing of the laminates.

Don't use inferior quality chemical dipped plywood as it can react with adhesive which may cause yellow patches after the installation.

Don't use synthetic rubber adhesive for bonding at it may lead to brown/colored patches on Acrylic Laminates.


Don't place hot cookware directly on the Acrylic Laminates.

Prolong exposure of Acrylic Laminate above 30-degree temperature should be avoided.


YOU CAN AVOID PROBLEMS LIKE AIR BUBBLE & DELAMINATION ACRYLIC LAMINATE



Avoid the lamination process of Acrylic Laminates under high humidity environment.



Don't use uneven surface substrate (plywood, MDF, Particle Board) that may lead to air vacuum and air bubble which may appear after the installation.



Insufficient or lack of pressing during the bonding period of Acrylic Laminates.



Prevent the base substrate (Plywood, MDF, Particle Board) to absorb moisture. Because after few days of installation, it gradually loses moisture and this resulting in air bubble formation between Acrylic Laminate and substrate.



Don't use the water base synthetic resin adhesive any other the PEVA (Polyethylene Vinyl Acetate Co-polymer)



Take extra care during use of big size acrylic laminate for paneling because due to the bigger surface area, improper lamination may lead to air bubble formation after installation.

TECHNICAL

INDEX

DESIGN NO.	FINISH	PAGE NO.
FLUTE		
FT-01	FLUTE	9
FT-02	FLUTE	12
FT-08	FLUTE	11
FT-15	FLUTE	11
FT-16	FLUTE	12
M-01	MARBLE	15
M-02	MARBLE	17
M-03	MARBLE	18
MIRROR		
MR-01	MIRROR	21
MR-02	MIRROR	20
MR-03	MIRROR	21
SHIMMER		
SM-01	SHIMMER	23
SM-02	SHIMMER	23
SM-03	SHIMMER	23
SM-04	SHIMMER	23
METALLIC		
MT-01	METALLIC	26
MT-02	METALLIC	27
MT-03	METALLIC	24
MT-04	METALLIC	25
MT-05	METALLIC	24

DESIGN NO.	FINISH	PAGE NO.
MT-06	METALLIC	26
MT-07	METALLIC	27
MT-08	METALLIC	27
MT-09	METALLIC	25
UNI COLOR		
S-01	UNI COLOR	29
S-02	UNI COLOR	34
S-03	UNI COLOR	33
S-04	UNI COLOR	32
S-05	UNI COLOR	33
S-06	UNI COLOR	31
S-07	UNI COLOR	33
S-08	UNI COLOR	31
S-09	UNI COLOR	31
S-10	UNI COLOR	36
S-11	UNI COLOR	37
S-12	UNI COLOR	36
S-13	UNI COLOR	38
S-14	UNI COLOR	33
S-15	UNI COLOR	39
S-16	UNI COLOR	39
S-17	UNI COLOR	38
S-18	UNI COLOR	34
S-19	UNI COLOR	39
S-20	UNI COLOR	34

FAQs

Reasons for air bubble formations on Acrylic Sheets



Acrylic are bonded in extremely humid conditions



Use of water base synthetic resin adhesive any other than PEVA (Polyethylene Vinyl Acetate Co-polymer)



When substrate loses moisture after installation



Debonding in certain areas because of uneven substrate surface



Insufficient or lack of pressing during the bonding period of laminate



Use of large size acrylic/PVC laminate sheets

To avoid delamination / air bubbles in between ply and laminate the above steps should be taken care of. Bonding of acrylic sheets shouldn't be completed under high humidity

Disclaimer

The Products are tested to be reasonably free of defects, and when used and fabricated properly they will comply with the applicable manufacturing specifications within realistic deviations. We recommend customers to inspect products properly before installing. Product's warranty in no way covers defects and non-compliance from or otherwise attributable to any other causes, including, without limitation the following:

- Improper handling / transportation /Acrylic Sheets
- Improper installation of Acrylic Sheets
- Improper or unintended usage of Acrylic Sheets
- Lack of or improper maintenance of Acrylic Sheets
- Exposure to high temperatures
- Unauthorized alteration to the products
- Outdoor applications
- Do not use plywood with high moisture content
- Do not use ply with uneven surface
- Avoid using inferior quality adhesive
- Apply sufficient pressure
- Avoid pasting of sheets on the printed/branding area of the Plywood
- There will be no guarantee or exchange under any circumstances
- Color variations in products from different batches are possible
- We recommend using products from same batch to avoid color variations
- This brochure is for presentation purposes only. Actual colors may differ.

Sheet Size : 8' x 4' (2440 X 1220mm)
 Lenght & Width Tolerance : ± 1 inch
 Thickness Tolerance : ± 0.10mm